

SVB4A & SVBLF4A

Spill Resistant Pressure Vacuum Breaker

SUBMITTAL SHEET

"Apollo" Flow Controls



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO#:	
Rep:	
Wholesale Dist.:	

DESCRIPTION

The Apollo® Series SVB 4A Spill Resistant Vacuum Breaker is designed to prevent contamination of the potable water supply due to back-siphonage. The SVB is ideally suited for continuous pressure, indoor applications where water spillage is undesirable. The device has a straight through flow path for minimal head loss. All components are easily accessible for easy repair and maintenance. All components are made of corrosion resistant materials for years of reliable service. Should be installed 12" above all downstream piping.

FEATURES

- Modular Captured Spring Check Valve
- Shut-Off Valves w/ Stainless Steel Handles and Nuts
- Threaded Testcock Protectors
- Designed For Easy Maintenance
- Lead-Free Option
- Low Head Loss
- 5 Year Warranty

PERFORMANCE RATING


- Maximum Operating Pressure: 150 psi
- Temperature Range: 33 °F - 200 °F

APPROVALS

- ASSE 1056

STANDARD MATERIALS LIST

Body	Bronze C84400 or C89836 Lead Free*
Ball Valves, Test cocks	Bronze C84400 or C87800 Lead Free*
Canopy	UV-Resistant ABS
Bonnet	Glass-Filled PPO
Check Valve Cartridge	Glass-Filled PPO
Springs	Stainless Steel
Seat Discs	Chloramine-resistant Silicone
Float	Glass-Filled PPO
O-rings	Chloramine-resistant EPDM

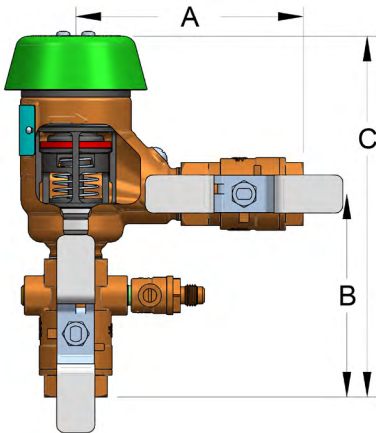

DIMENSIONS

PART NO.	LEAD FREE PART NO.	MODEL NO.	LEAD FREE MODEL NO.	DIMENSIONS (IN.) (MM)				WEIGHT	
				SIZE	A	B	C	LB.	KG.
4A-904-A2F	4ALF-904-A2F	SVB4A34	SVBLF4A34	3/4" (20)	4-1/2 (121)	4 (105)	7-1/4 (194)	3.0	1.4
4A-905-A2F	4ALF-905-A2F	SVB4A1	SVBLF4A1	1" (25)	5-3/8 (135)	4-3/4 (194)	8-1/8 (211)	4.2	1.9

PART NUMBER MATRIX

4A [XX]	90 X	XX	X
	SIZE	SHUT-OFF VALVES	
4A - Non-Lead Free	4 - 3/4"	A2 - w/ball valves (Standard)	F - SAE threaded test cocks (standard)
4ALF - Lead Free*	5 - 1"	A4 - w/union end ball valves	LL - locking lever handles

*LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law III-380. ANSI 3rd party approved and listed.

Customer Service (704) 841-6000
www.apolloflowcontrols.com

This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit apolloflowcontrols.com for the most current information.




SVB4A & SVBLF4A

Spill Resistant Pressure Vacuum Breaker

SUBMITTAL SHEET

"Apollo" Flow Controls

FLOW CURVE

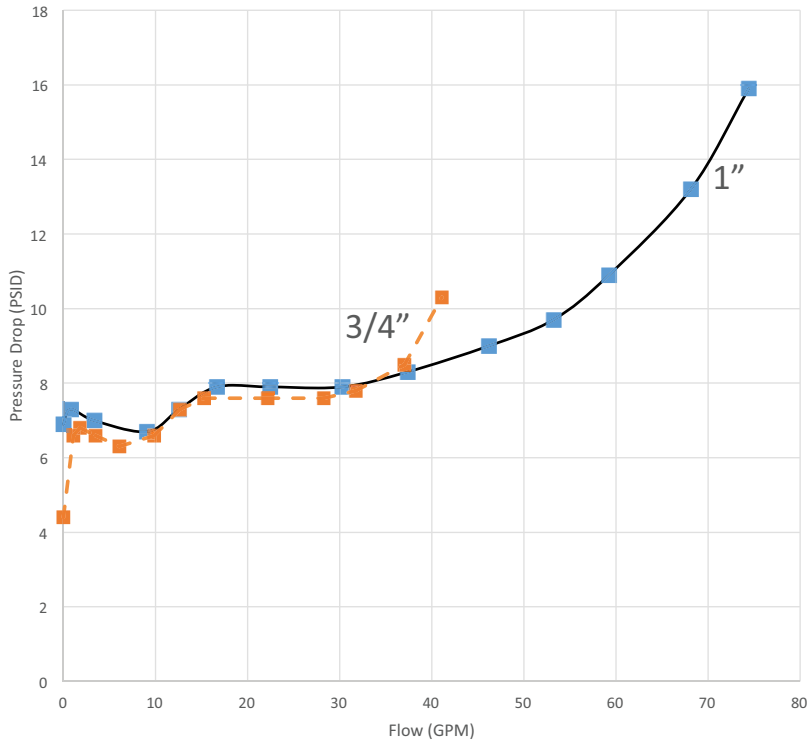

- Meter Rated Flow as determined by approval agencies, 7.5 ft/sec is the typical maximum Plumbing system flow rate.

Curves developed from independent approval agencies actual tests - Consult factory for details.